V26 VENTURI STEAM TRAP

V26 Venturi steam trap design with custom orifice made from special stainless and the most advanced steam traps on the market, reduces energy loss, has the ability to automatically regulate discharge flow through the condensate water system. There are no moving parts inside so the possibility of damage and need for maintenance during operation is low. Connect the steam trap to the pipeline system with threaded. Steam traps are designed up to size DN25 with variety flows rate. It is depending on each the technological system. Install horizontally or vertically. The direction is marked on the steam trap body. Guaranteed successful operation with each application. Steam trap application for heating systems, moisture separation, water discharge on main pipeline.

Series	**V26**
Size	DN15 to DN25
Connections	Threaded ISO 228, NPT, PT, Weld end
Body Material	Stainless steel, Carbon steel
Design Pressure	PN40
Design Temperature	350°C

Benefits of our technology:

- Reduce energy consumption loss up to 20%
- Heating efficiency
- Efficient and stable heating system
- Highly resistant with water hammer
- No moving parts, so low maintenance costs
- Low operating costs
- Compact, lightweight, low heat emissions
- Water and chemical treatment savings
- Improved cash flow
- Each trap supplied with full sizing and commissioning service
- Over 10 years performance guarantee

How it works

V26 steam trap operating with orifice principle. At start up the cold condensate and air release via orifice hole with maximum capacity. Condensate from system lease via office hole, automatic modulating condensate release to condensate pipeline...

Typical applications:

V26 steam trap with inline pipe connections are used for release condensate and air in industrial process applications such as process heating, heat exchangers, air heater, condensate from main pipeline, steam humidity separator...

Customers sectors:

- Hospitals & Hotels
- Food Processing Plants
- Pharmaceutical Industry
- Chemical Industry
- Manufacturing Industry
- Oil & Gas Industry
- Paper & Pulp Industry
- Industrial Sector
- Commercial Laundries
- Power Plants
- Beverage Industry
- Textile Industry
- And many more.

Dimensions:

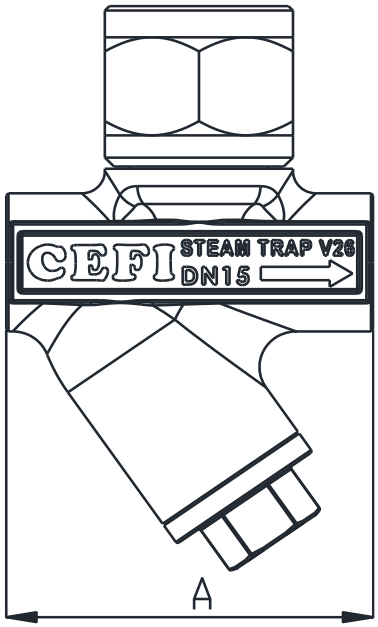

DIMENSION DN	A(mm)
DN15	80
DN20	90
DN25	96

CEFI COMPANY LIMITED
Address: 115/49 Thanh Loc 37, An Phu Dong ward 71516, Ho Chi Minh city, Viet Nam
Website: https://cefiint.com/ , E-mail: sales@cefiint.com

Typical performance data:

Applications	Max flow rate kg/ hr	
	at 10 barg	at 20 barg
Drip trap, header	40	50
Low flow rate process	200	1,000
High flow rate process	1,000	4,000
	2,000	8,000

Other performance please contact to our sales representative

Steam pipeline

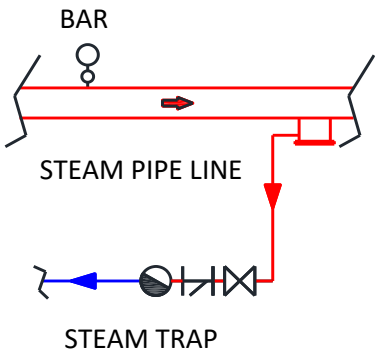

Humidity separator

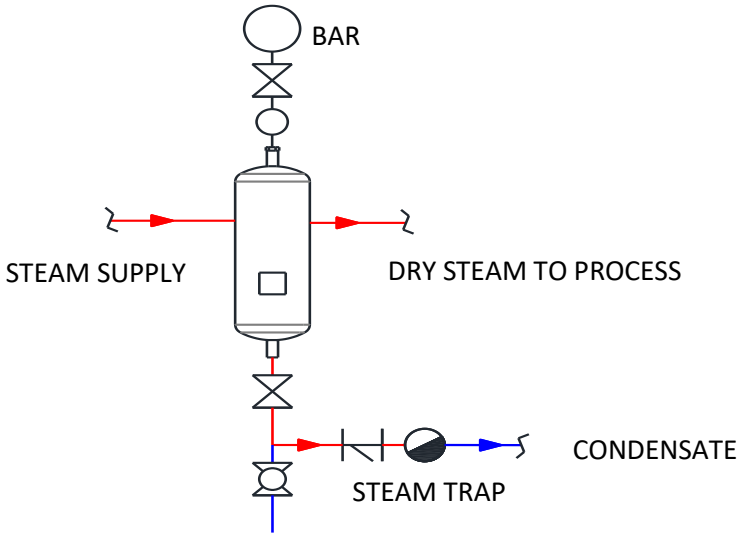

Heat exchanger

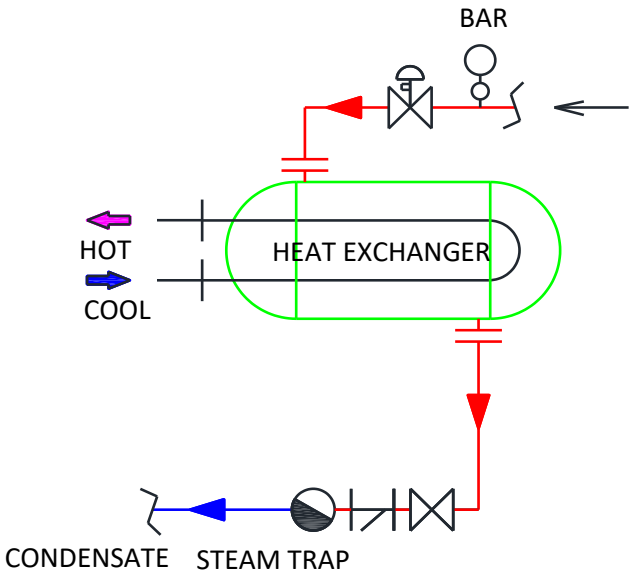

Air heat exchanger

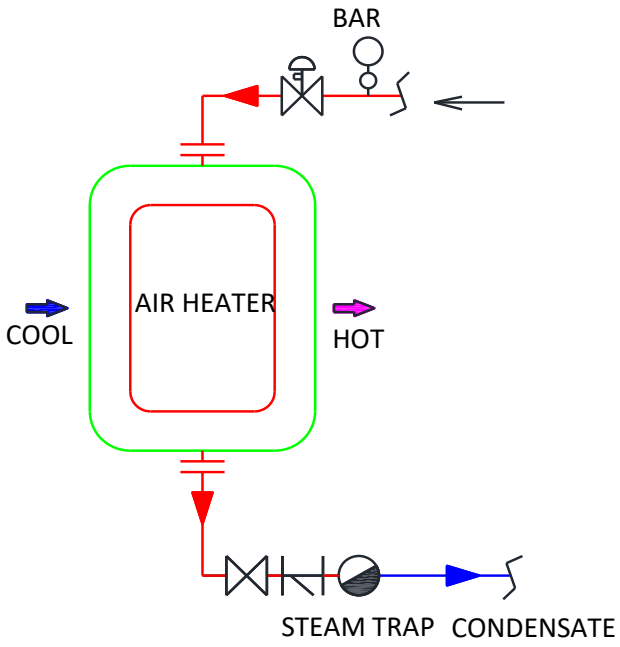

CEFI COMPANY LIMITED
Address: 115/49 Thanh Loc 37, An Phu Dong ward 71516, Ho Chi Minh city, Viet Nam
Website: https://cefiint.com/ , E-mail: sales@cefiint.com